

## Toyota Original and Genuine

### Stripe Tape (Type 1)

### Installation Manual

Thank you for purchasing the Toyota original one-point stripe.  
This manual explains how to attach a one-point stripe.  
Please read this manual before attaching.

#### Part Number

Part Number

08231-47010

08231-47010



TOYOTA  
GENUINE PARTS

QTY: 1

REMOVABLE

TOYOTA MOTOR CORPORATION  
MADE IN JAPAN T1 5J19

#### Components

①



× 2 Sheets  
Common Part  
for RH and LH

②




This  
Installation  
Manual

No.	Items	Part Number	Quantity
①	One-Point Stripe	08231-47011	2
②	Manual		1

#### Summary of how to attach

LH

RH

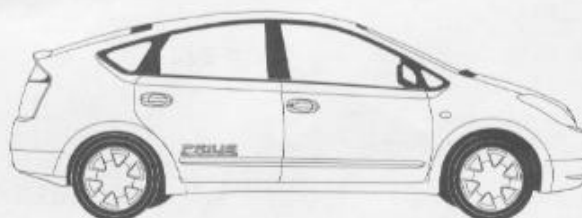

## Equipment Needed

Squeegee, cloth or paper towel, white gasoline, masking tape, spray bottle with water and 1% detergent mixture, dryer (if the temperature is below 15 degrees Celsius).

## Notice

- Remove oil on surface with white gasoline.
- Use dryer to warm up the car body when the temperature is below 15 degrees Celsius.
- Do not work in a dusty place
- Do not wet with water or rain until after 20 minutes after installation.


### Advice

This manual denotes the points for safe and special work with the following sign.


## Instructions on how to attach

Chart 1


[LH]

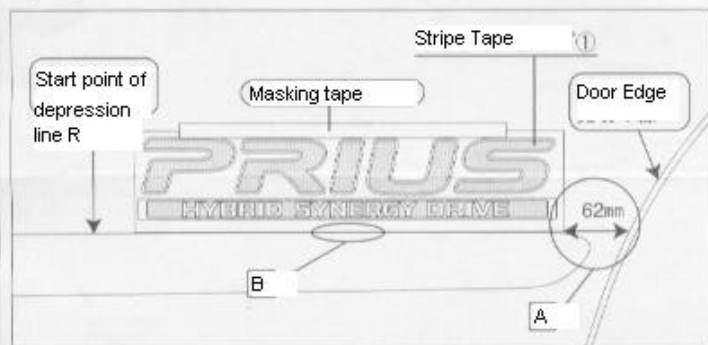

[RH]

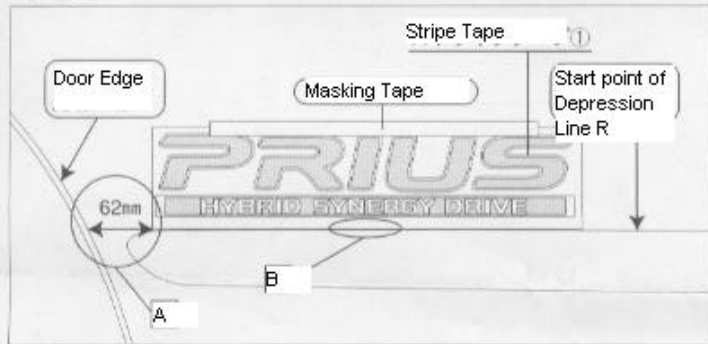

Cross Section of Point B

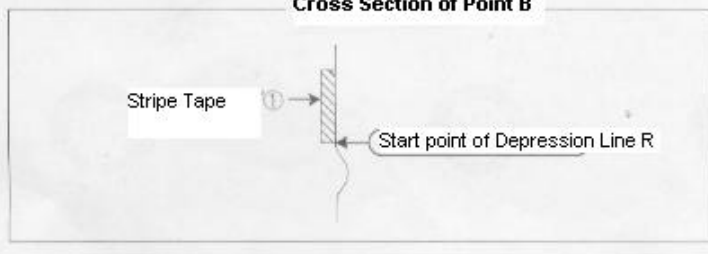


### 1. How to attach Stripe Tape

- (1) As in Chart 1, decide the place to install the Stripe Tape referring to Point A and Point B and tape with masking tape

#### Advice

Before attaching, go a distance from the car and make sure the that the Stripe Tape and depression line are parallel with each other.

**Chart 2**

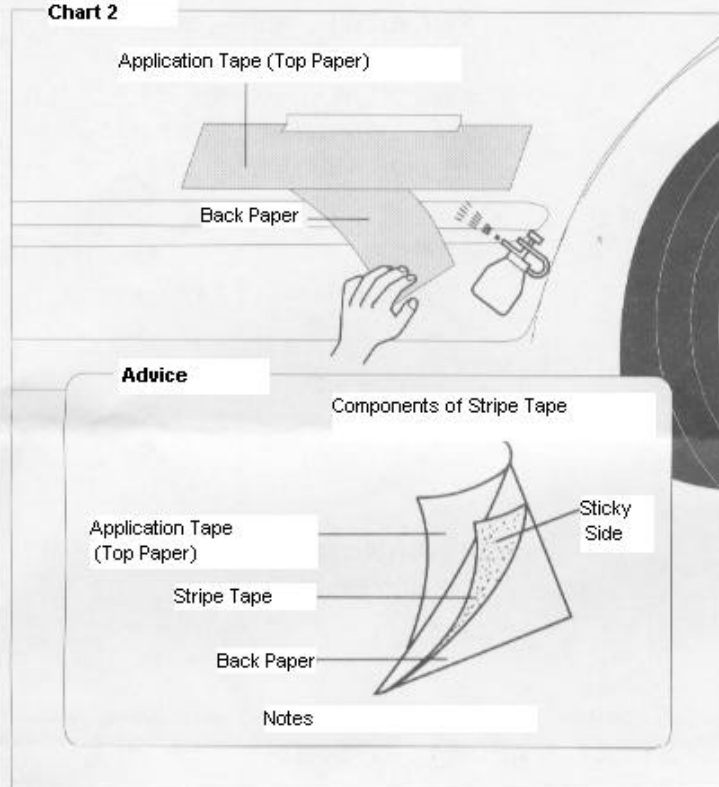


- (2) As in Chart 2, spray water (with approximately 1% detergent) on body surface and sticky side of stripe tape while pulling up the application tape and peeling off the back paper.

**Advice**

Do not touch the stick side when peeling off the back paper

During summer (over 30 degrees Celsius), spray more water.

**Chart 3**

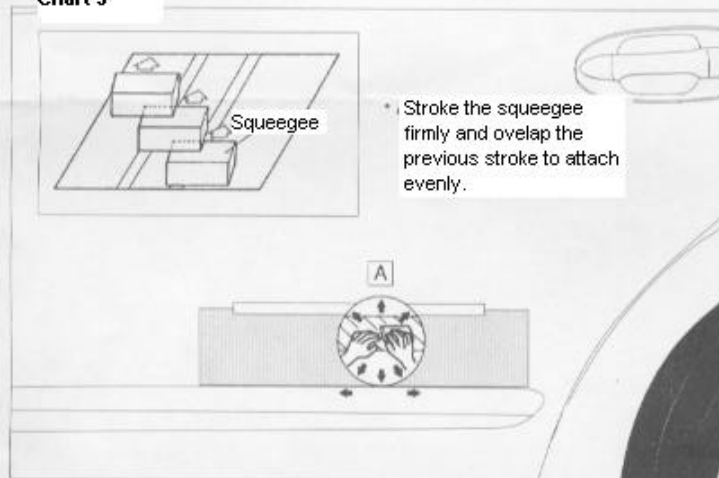


- (3) Holding the tape by hand, stroke the squeegee from the center of the of the stripe tape to the edges as shown in Chart 3, View A.

**Advice**

For smoother strokes, attach Teflon tape on the surface of the squeegee that faces the stripe tape.

Stroke the squeegee firmly and on the whole surface of the stripe tape.


**Chart 4**

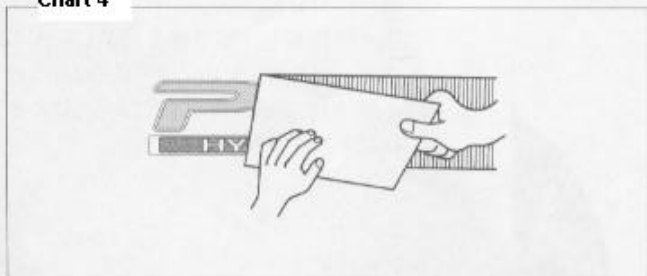

- (4) Move to right side of the car and attach Stripe Tape following Steps (2) and (3).
- (5) Move to left side of the car and peel off the Application Tape (Top Paper) in the direction as indicated in Chart 4.

**Advice**

Peel off Back Paper with this angle as small as possible

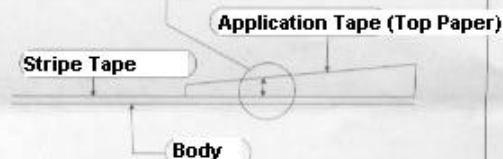

- (6) Move to right side of the car and peel off the Application Tape (Top Paper) in the direction as indicated in Chart 4.

**Note For After Installation**

- Please do not peel off the Stripe Tape after attaching as it may be stretched out or the adhesive may lose the stickiness.