

# Front License Plate & Mounting Bracket Installation

**Service Category** General

**Section** Pre-Delivery Service

**Market** USA

Toyota Supports  
 ASE Certification 

## Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2010	Prius	

## Introduction

The front license plate mounting bracket and two self-tapping screws for the 2010 model year Prius are stored in the glove box.

For states that require a front license plate, install the license plate mounting bracket and license plate during Pre-Delivery Service (PDS).

## Warranty Information

OP CODE	DESCRIPTION	TIME	OFP	T1	T2
N/A	Not Applicable to Warranty	–	–	–	–

## Front License Plate & Mounting Bracket Installation


### Installation Procedure

1. Align holes "A" of the mounting bracket with the dimples on the front bumper cover. Mark the location of holes "B" on the front bumper cover.

**NOTE**

- Holes "A" are used for installation of the mounting bracket to the bumper cover.
- Holes "B" are used for installation of the front license plate to the mounting bracket.

Figure 1.

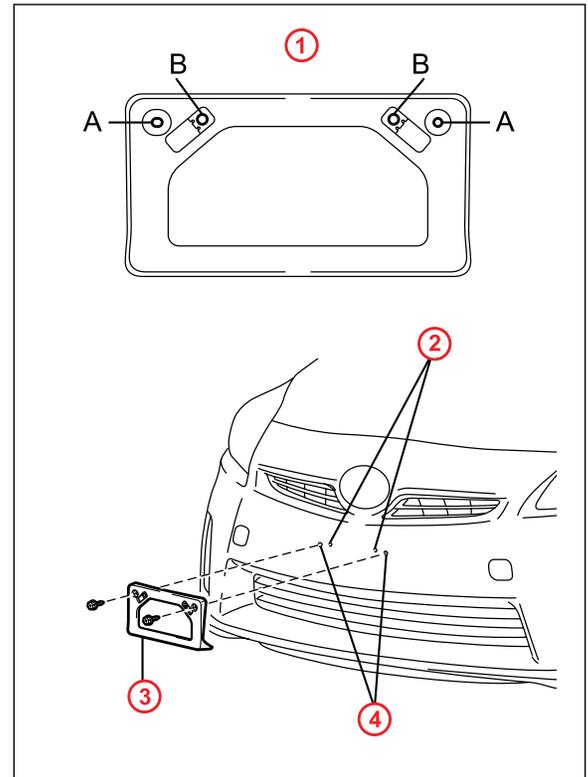

1	Mounting Bracket
2	Mark and Drill Holes
3	Mounting Bracket
4	Dimples

2. Drill two relief holes with a diameter of 11 mm (0.43 in.) at the hole "B" marks on the front bumper cover to prevent the license plate retaining bolt end from contacting the cover.

**NOTE**

Do NOT drill at the dimples on the front bumper cover.

## Front License Plate & Mounting Bracket Installation


### Installation Procedure (Continued)

3. Install the mounting bracket to the front bumper cover by attaching the two self-tapping screws into the dimples.

**NOTE**

The self-tapping screws for the mounting bracket are located in the glove box.

**Figure 2.**

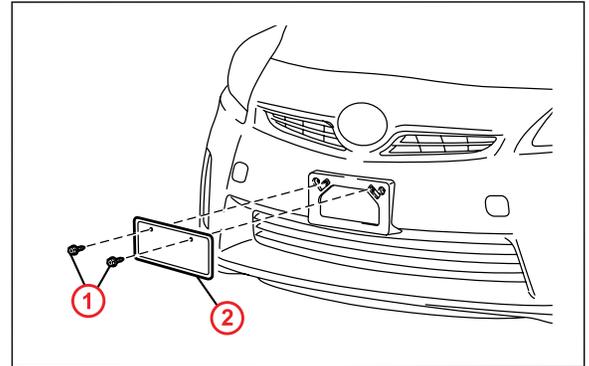

<b>1</b>	License Plate
<b>2</b>	Bolts

4. Install the front license plate to the mounting bracket using bolts with the following dimensions.  
**Length: 20.0 – 25.0 mm (0.79 – 0.98 in.)**  
**Diameter: 6.0 mm (0.24 in.)**  
**Pitch: 1.0 mm (0.04 in.)**