






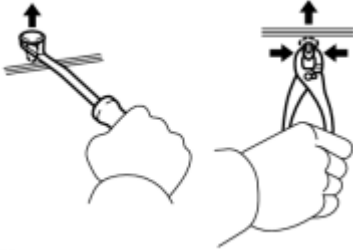


Illustration	Symbol	Part Name	Abbreviation
 N	 N		
 N	 N	CIRCUIT BREAKER	CB




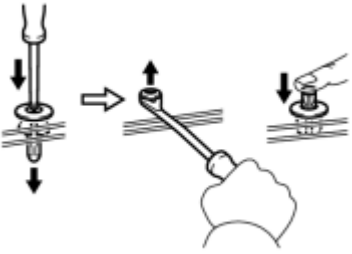

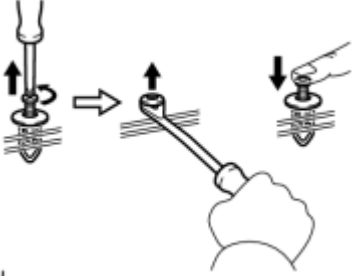

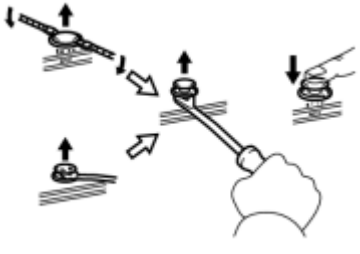
(g) CLIPS

(1) The removal and installation methods of typical clips used for vehicle body parts are shown in the table below.

HINT:

If clips are damaged during a procedure, always replace the damaged clips with new ones.

Shape (Example)	Removal/Installation
 N	 N Remove the clips with a clip remover or pliers.
 N	 N Remove the clips with a clip remover or screwdriver.

Shape (Example)	Removal/Installation
 <p>N</p>	 <p>N</p> <p>Remove the clips with a wide scraper to prevent panel damage.</p>
 <p>N</p>	 <p>N</p> <p>Remove the clips by pushing the center pin through and prying out the shell.</p>
 <p>N</p>	 <p>N</p> <p>Remove the clips by unscrewing the center pin and prying out the shell.</p>
 <p>N</p>	 <p>N</p> <p>Remove the clips by prying out the pin and then prying out the shell.</p>

(h) CLAWS