

Figure 1 – standard configuration. Battery ECU & Motor ECU on single CAN bus

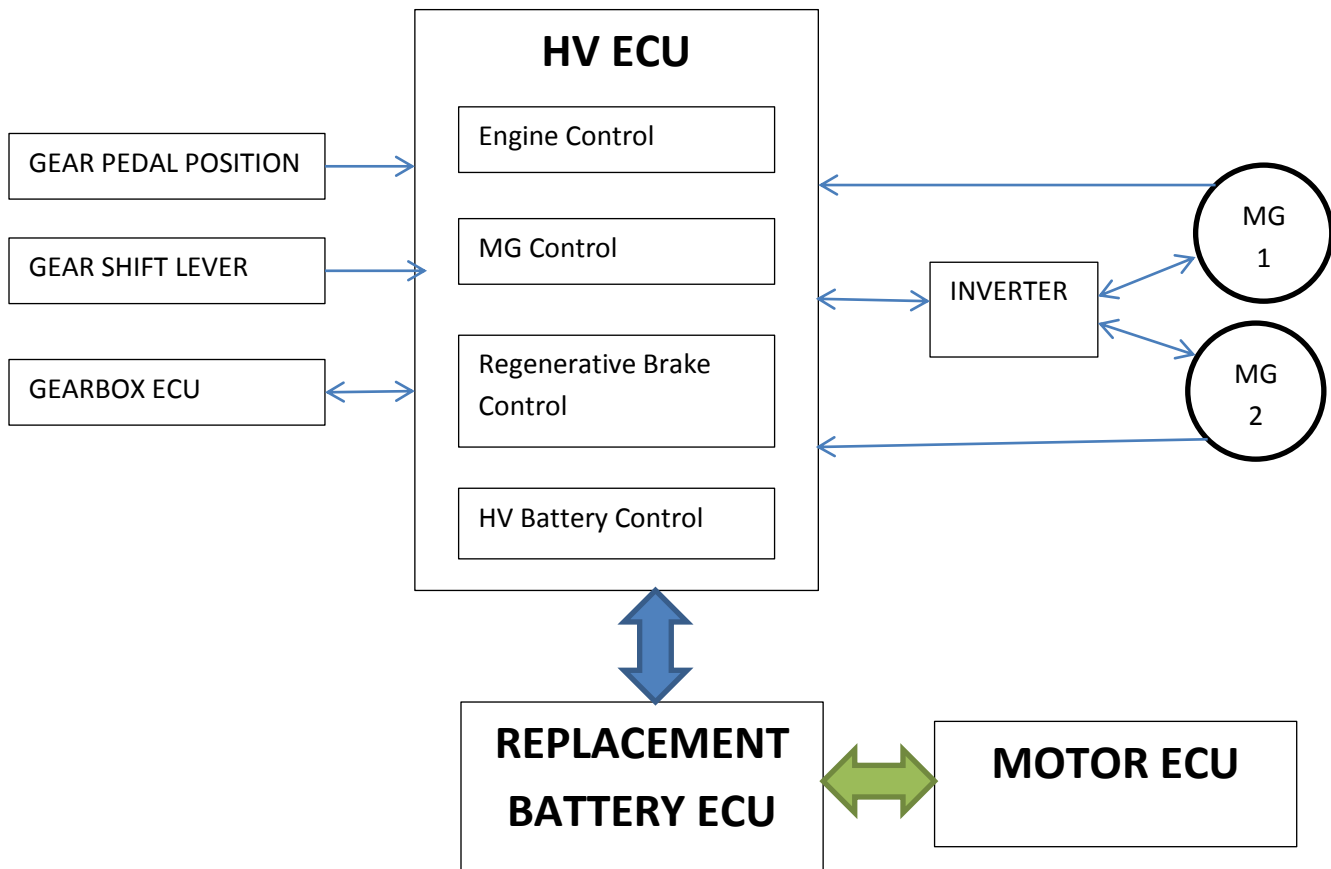


Figure 2 – updated configuration. Replacement Battery ECU acts as gatekeeper between two separate buses