


CONSOLE BOX SUB-ASSY REAR REPLACEMENT

710LP-01


HINT:

- ★ Installation is in the reverse order of removal.
- ★ COMPONENTS: SEE PAGE 71-1

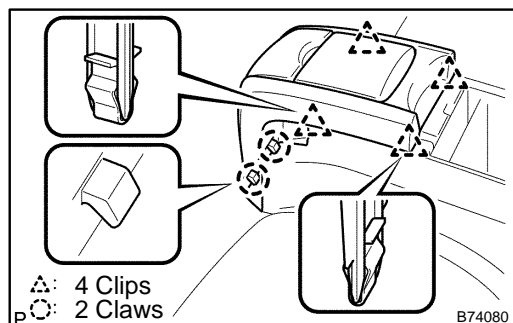

1. REMOVE CONSOLE PANEL SUB-ASSY UPPER


- (a) Pull the console panel sub-assy upper upwards and then disengage the 2 claws.
- (b) Disengage the 4 clips and then remove the console panel sub-assy upper.

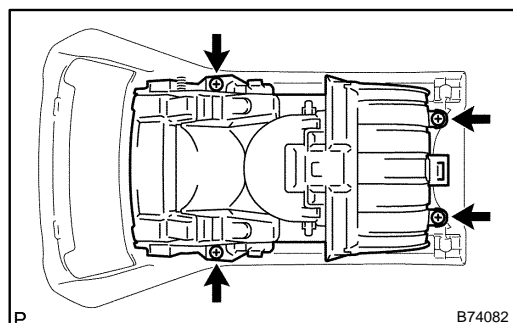

- (1) Remove the 4 screws and then the installment panel cup holder.

2. REMOVE CONSOLE BOX POCKET

3. REMOVE CONSOLE BOX CARPET

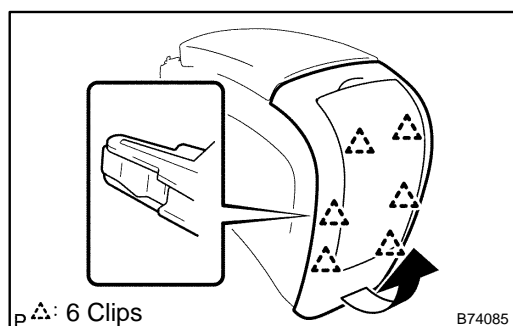

4. REMOVE CONSOLE REAR END PANEL SUB-ASSY

- (a) Pull up the console rear end panel sub-assy in the direction indicated by the arrow to disengage the 6 clips, and remove.