



Technical Service BULLETIN

November 28, 2005

Title:

FRONT LICENSE PLATE MOUNTING BRACKET & LICENSE PLATE INSTALLATION

Models:

'06 Prius

P D085-05

PRE-DELIVERY SERVICE

Introduction Follow the procedures outlined in this TSB to install the front license plate mounting bracket and front license plate.

Applicable Vehicles

- 2006 model year **Prius** vehicles.

Parts Information

PREVIOUS PART NUMBER	CURRENT PART NUMBER	PART NAME	QTY
00473-00001	Same	Kit, Self-tapping Screw	1

Warranty Information

OP CODE	DESCRIPTION	TIME	OFP	T1	T2
N/A	Not Applicable to Warranty	—	—	—	—

Installation Procedure

1. Align holes "A" of the mounting bracket with the dimples on the front bumper cover. Mark the location of holes "B" on the front bumper cover.


NOTE:

- Holes "A" are used for installation of the mounting bracket to the bumper cover.
- Holes "B" are used for installation of the front license plate to the mounting bracket.
- The front license plate bracket is located in the glove box.

2. Drill two relief holes with a diameter of 11 mm (0.43 in.) at the hole "B" marks on the front bumper cover to prevent the license plate retaining bolt end from contacting the cover.

NOTE:

Do NOT drill at the dimples on the front bumper cover.

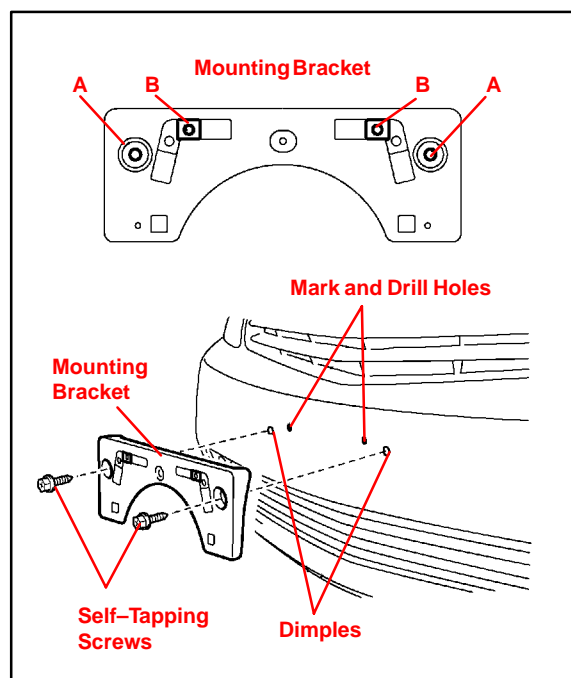


**Installation
Procedure**
(Continued)

3. Install the mounting bracket to the front bumper cover by attaching the two self-tapping screws into the dimples.

NOTE:

- Tighten the driver's side self-tapping screw first and then tighten the passenger's side self-tapping screw.
- The self-tapping screws are located in the glove box.

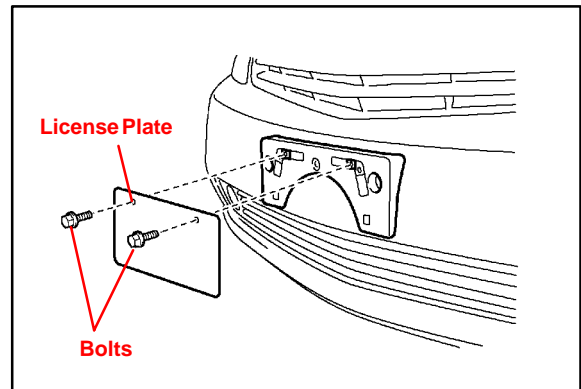

4. Install the front license plate to the mounting bracket using bolts with the following measurements.

Length: 20.0 – 25.0 mm (0.79 – 0.98 in.)

Diameter: 6.0 mm (0.24 in.)

Pitch: 1.0 mm (0.04 in.)