

LeBra®

Owner's Manual

Model #551094 - LeBra® Toyota Prius


About Your Global Accessories Product

Congratulations on your purchasing decision. Global Accessories, Inc. designed the LeBra® Front End Cover to be the very best available. With proper care, your LeBra® Front End Cover will provide years of stylish looks and maximum protection.

Installation of the LeBra® Front End Cover is a simple process that should take about 30 minutes. Removal and reinstallation (as for car washing) takes just a few minutes.

If you encounter any problems during the installation of your LeBra® Front End Cover, please contact our Consumer Response Department, Monday - Friday, 9AM - 4PM (MST) at 1-800-950-9502.

Note: Please read this manual thoroughly before beginning the installation. After completing installation, keep this manual for further reference.

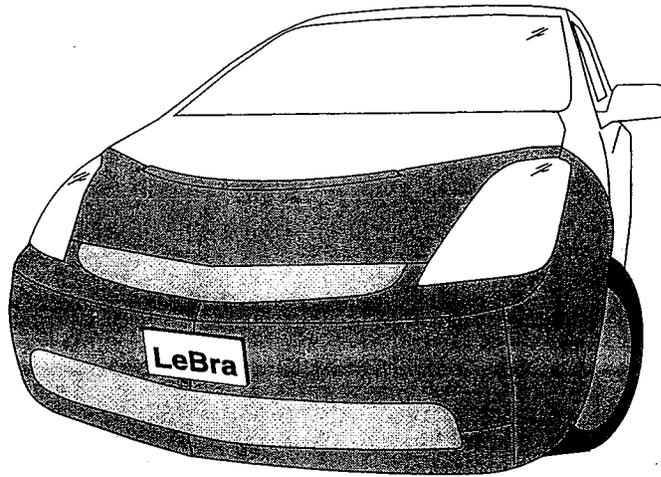

Tips for Easier Installation and Care

- Before Installation, wash and wax your vehicle. Use a paste wax—not a spray—on the hood and fenders in order to maintain the finish underneath the LeBra® Front End Cover.
- Install the LeBra® Front End Cover in temperatures of 70°F (21°C) or higher. The warmth will make the fabric more pliable and will allow it to stretch slightly for a tighter and smoother fit.
- Do not use vinyl cleaners or protectants on your LeBra® Front End Cover. These cleaners reduce the breathability of the vinyl and will void the Global Accessories Warranty.
- Do not install the LeBra® Front End Cover on any vehicle that does not still have its original factory paint. Global Accessories will not be held liable for any warranty claims of paint damage to repainted vehicles.
- Remember that the LeBra® Front End Cover also protects paint from fading due to sunlight while the rest of the car is exposed. Global Accessories will not be held liable for any warranty claims on sun-faded paint.
- **Caution:** There may be elastic straps described in some sections of this manual that can snap back if not properly hooked. To avoid injuries, exercise caution and use safety glasses when installing.
- Where available, always use the loops sewn to the cover to remove the plastic clips. DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER. When removing the cover, it will be easiest to reverse the installation steps.

Contents	
Parts List	Pg. 2
Installation Instructions	
Hood Cover	Pg. 2
Front End Cover	Pg. 2

Unpacking: What You Have

Remove all parts from the shipping container. Check each part included against the following Parts List and look for any possible damage from shipping.

Parts List

Item	Description	Qty
1	Cover, hood	1
2	Cover, front end	1
3	Warranty	1
4	Care and Maintenance Pamphlet	1

The right side of the fabric is indicated as:



The Hood Cover

One of the features that makes your LeBra® Front End Cover the very best available is the separate Hood Cover. This means that you can access the engine compartment without removing or adjusting the cover. Install the Hood Cover first, by following these steps:

Step One

Open the hood and slip the Hood Cover over the front edge of the hood. Make sure that the corners of the hood fit snugly into the corners of the Hood Cover. When the Hood Cover fits snugly, stretch the fabric at straps to remove major wrinkles.

Step Two

Pull one of the straps sewn to the Hood Cover to the hole in the hood's underside, as shown in Figure 1. Adjust the Buckle Hook so that it is about 1/2" away from the hole. Now pull the strap down and slip the Buckle Hook into the hole. To release the tension on the webbing for adjustment of the strap, simply pull out on the tab on the Buckle Hook (see Figure 2).

The Strap should be quite taut (as taut as possible without tearing). Relocate the Buckle Hook if necessary to tighten. Tie off excess strap to keep free of the engine compartment. Repeat this process for the other side.

Note: Check all straps periodically to insure tension. Adjust tightness if necessary.

Figure 1


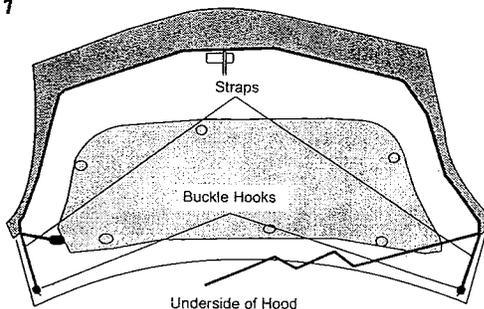



Figure 2

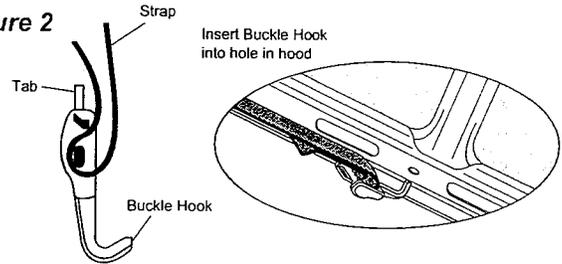

Step Three

With the Hood Cover in place, pull the fabric on the sides of the hood around to the underside of the hood on both sides. This will insure maximum tightness of the Hood Cover (see Figure 3).

Figure 3

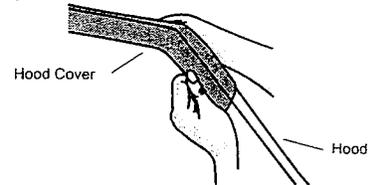

Step Four

The remaining strap provides better tension and stability for the cover. Stretch the remaining strap across the underside of the hood and thread it through the buckle on the opposite side (see Figure 4a). Do not twist the strap. Pull the strap to remove slack, DO NOT OVERTIGHTEN. Loop the excess strap back through the buckle to keep it out of the engine compartment (see Figure 4b). Again, make sure the strap is taut.

Figure 4

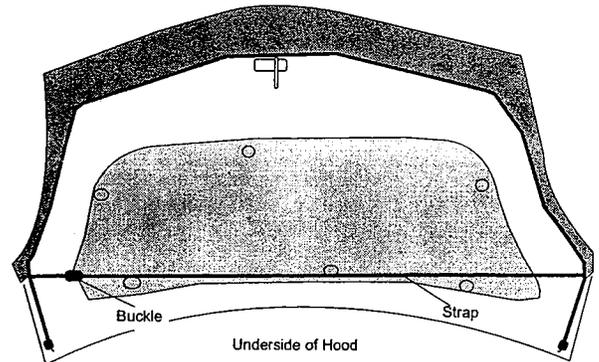


Figure 4a



Thread strap through buckle

Figure 4b



Pull strap straight through buckle to tighten

Figure 4c



Thread excess strap back through buckle.

Installing the Front End Cover

This section explains how to install the front cover portion of your LeBra® Front End Cover.

Note: Instructions for license plate opening. Cut out the indented, rectangular area in the center of the cover, if you choose to use your front license plate. Be sure to cut inside and as close to the indentation as possible.

Step One


Orient the cover on the vehicle. The bottom of the cover will be stamped on the inside. If necessary, slip the opening in the cover around the license plate bracket.

Note: Turn the wheels for easier access to the wheel wells.

Step Two

Pull the cover back to one of the wheel wells and locate the plastic strip and four plastic clips sewn to the cover in the wheel well (see Figure 5). Slip the plastic strip in the top behind the edge and hook the plastic clips to the edge of the fender. Pull the cover around the front of the vehicle and attach it to the opposite wheel well.


Figure 5

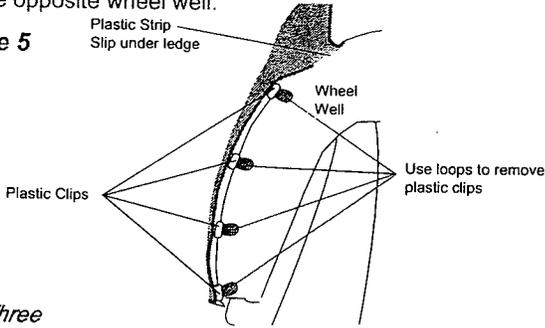

Step Three

Pull the cover up over the bumper and locate the reinforced pocket sewn to the cover under each headlight opening (see Figure 6). Slip the pockets as far as possible under the headlights.


Figure 6

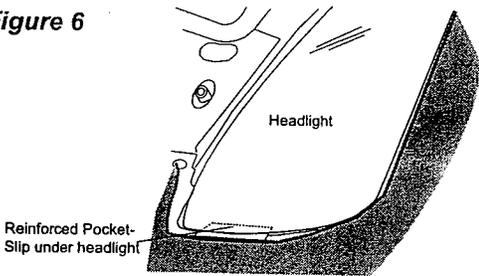

Step Four

Pull the grille screen up over the grille and locate the (3) plastic clips sewn to the top of the cover (see Figure 7). Hook the clips to the top of the grille.


Figure 7

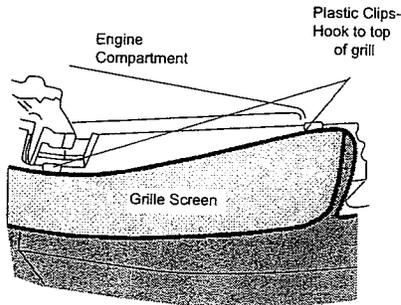

Step Five

Locate the seven plastic clips sewn across the bottom of the cover, five (5) across the front and one under each fender (see Figure 8). Hook the plastic clips to the ledge under the vehicle.


Figure 8

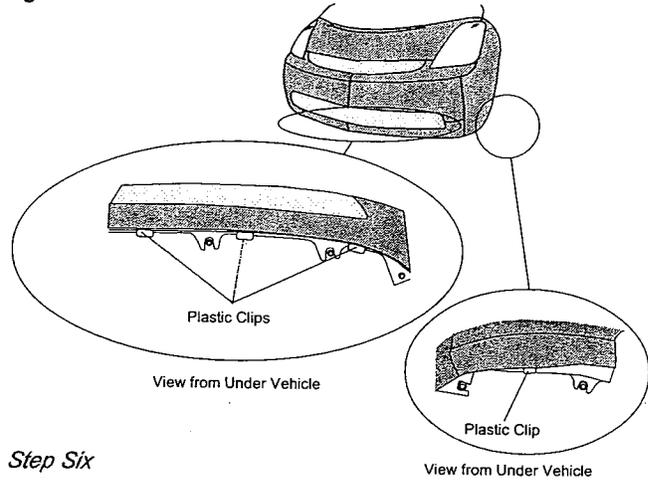

Step Six

Pull the sides of the cover up over the fender and slip the plastic strips sewn into the side of the cover down in beside the headlight (see Figure 9). Then locate the plastic strip sewn to the top corner of the cover on each side of the engine compartment (see Figure 9). Slip the strip behind the headlight on each side of the engine compartment.

Figure 9

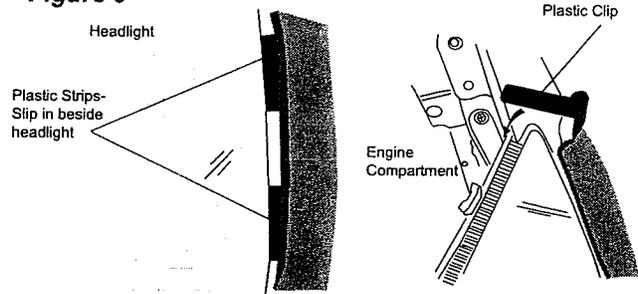

Note: Where available, always use the loops sewn to the cover to remove the plastic clips. **DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER.** When removing the cover, it will be easiest to reverse the installation steps.

"This completes the installation of your custom-designed front end cover."

LIMITED WARRANTY

LeBRA/CUSTOM FRONT END COVER LIMITED WARRANTY

GLOBAL ACCESSORIES ("GLOBAL") warrants to the original consumer purchaser ("you") the following about your new LeBra Custom End Cover/Custom Hood Protector when purchased from an authorized dealer/service provider ("dealer").

GLOBAL warrants the vinyl material of the LeBra Front End Cover/Custom Hood Protector to be free from defects in materials and workmanship for 90 days.

GLOBAL will, at its option, repair or replace any LeBra Front End Cover/Custom Hood Protector which it finds to be defective in material or workmanship at no charge and return it postage paid.

This warranty extends only to the original consumer purchase of the LeBra Front End Cover/Custom Hood Protector when purchased and originally installed within the boundaries of the United States, Canada, and Mexico. This warranty begins on your purchase date. This warranty terminates upon any transfer of ownership or if the cover is installed or relocated outside the boundaries of the United States, Canada, and Mexico by the original consumer purchaser prior to the expiration of the warranty period.

This limited warranty does not cover problems that result from:

- External causes such as accident, abuse, or misuse.
- Usage that is not in accordance with product instructions.
- Failure to follow the product instructions.

Except as described above, this warranty does not cover defects or damage due to normal wear and tear, improper installation, alteration without GLOBAL'S prior written consent, accident, acts of God, misuse, abuse, commercial or industrial use, use of an accessory not approved by GLOBAL, failure to follow GLOBAL'S instructions or Owner's Manual or repairs made or attempted by anyone other than an authorized representative of GLOBAL.

TO THE EXTENT PERMITTED BY LAW, GLOBAL SHALL NOT BE LIABLE FOR LOSS OF USE OF THE COVER OR OTHER INCIDENTAL OR CONSEQUENTIAL COSTS, EXPENSES, OR DAMAGES. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. ANY IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED TO THE DURATION OF THE APPLICABLE WARRANTY STATED ABOVE. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you.

This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

Tips for Easier Installation, Care & Maintenance

LeBra[®]

CUSTOM FRONT END COVER

Tips for Easier Installation, Care & Maintenance

Congratulations on your purchasing decision. Saddleman designed the LeBra® Front End Cover to be the very best available. With proper care, your LeBra® Front End Cover will provide years of stylish looks and protection for your vehicle.

1 Read this manual thoroughly before installation.
After completing installation, keep this manual for further reference.

2 Check the label on the box to make sure the application is correct for your vehicle.

3 Carefully wash and wax your vehicle before installing the LeBra®. Use a quality protectant wax appropriate for your vehicle's finish.

4 Install the LeBra® in temperatures of 70° F (21° C) or higher. In cooler climates, this may be accomplished in your garage or another warm location. The warmth will make the fabric more pliable and will allow the LeBra® to stretch slightly for a tighter and smoother fit. After installation is complete, **make sure the cover is tight at all times**. Warm weather will cause the material to expand and it may be necessary to retighten the cover.

5 **We do not recommend installing the LeBra® on any vehicle that has been repainted.**

6 **Do no use vinyl protectants on your LeBra®.** These products clog the perforations that permit the cover to *breath* and dry.

7 Your LeBra® is constructed of "breathable" vinyl. "Breathable" means that the fabric is perforated to allow air to pass through and to allow moisture to escape while driving. Moisture trapped between the vehicle and the LeBra® while the car is stationary can cause the paint to cloud or fade. Remove the LeBra® if it becomes wet and when the vehicle will not be driven. Allow the vehicle and LeBra® to dry completely before reinstalling.

8 **Do not allow dust or dirt to accumulate under the LeBra®.** These accumulations can damage the paint on the vehicle. Remove the LeBra® every two weeks, and if needed, wash both the vehicle and the Front End Cover. Do not leave the LeBra® on the vehicle when washing. Soap may become trapped between the fabric and painted surface and may cause damage. To further protect your vehicle's finish, wax as often as needed.

9 If the LeBra® starts flapping due to high winds or excessive car speed, pull over immediately and retighten the LeBra® or remove it.

Flapping may damage the paint on your vehicle.

10 Clean the LeBra® inside and out with warm water, liquid dish soap and a soft brush, then rinse thoroughly. Allow to dry completely before reinstalling. **Do not clean in a washing machine or dryer.**

11 If you encounter any problems during the installation of your LeBra® Front End Cover, please contact our customer service department, Monday - Friday, 9 a.m. - 4 p.m. (MST) at 1-435-752-1000.

Trouble Shooting Guide

LeBra® does not fit.

Check to see if the LeBra® is covering the headlights (this should not happen). Check the white cloth surface of the LeBra® near the outside seam. You should see the word "Bottom" and the "Model Number" of your LeBra® stamped along the edge. Position the LeBra® on the car so the word "Bottom" is at the bottom edge of the vehicle.

LeBra® is only made for factory manufactured front ends. If your vehicle has any aftermarket accessories on the front end, the LeBra® will not fit.

Hood piece flaps at highway speeds.

This can usually be remedied by loosening the strap that runs left to right underneath the hood. Also, make sure the fabric is pulled tightly around the edges of the hood.

Fender clips will not reach specified attachment points.

Make sure clips have been attached in the order specified in the instructions. If they are attached out of order, it may not allow sufficient stretching of the vinyl to allow the fender clips to reach. For ease of installation, we recommend to install the LeBra® in temperatures above 70°F (21° C) - cooler temperatures will render the vinyl non-pliable or may cause tearing at the seams.

Caution: Do not pull on the web loops sewn to the clips while installing. They are designed only to give the user a place to grip when removing the LeBra® from the vehicle.


Additional Parts.

Buckle hooks are tied to the straps on the hood piece or enclosed in the box in a plastic bag. If additional parts are required, contact the place of purchase to obtain the pieces you may need.

IMPORTANT!!

TOP EDGE OF HOOD COVER SHOULD NOT LAY FLAT
AGAINST THE PAINTED SURFACE OF THE VEHICLE

TURN THE DEFLECTOR LIP (THAT RUNS ALONG THE TOP OF THE HOOD) UP SO THE STITCHED
FELT PORTION IS IN CONTACT WITH THE PAINTED SURFACE AS SHOWN

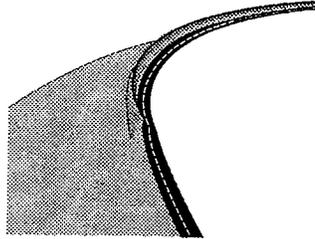

DO NOT ALLOW THE VINYL BINDING THAT RUNS ALONG THE OPPOSITE SIDE OF THE
STITCHED FELT LINING TO COME IN CONTACT WITH THE PAINTED SURFACE OF THE HOOD

SIP-IS 8/05