


SUSTEC STRUT TOWER BAR

SUSTEC STRUT TOWER BAR MANUAL INSTRUCTION 《Read this Manual Instruction before installation and usage.》

Thank you for your purchase of our product.

- The users and workshops who use/install this product are requested to observe this Manual instruction for its correct usage.
- Use this product only for the applicable car models.
- Keep this Manual Instruction together with the Manual Instruction and Repair Note of your car so that you may refer to them whenever necessary. When you transfer the car, attach this Manual Instruction to it without fail.
- Workshops who install this product are responsible for the installation. Observe this Manual Instruction and Repair Manual issued by the car makers.
- This product is subject to change without prior notice.

Composition of the Strut Tower Bar

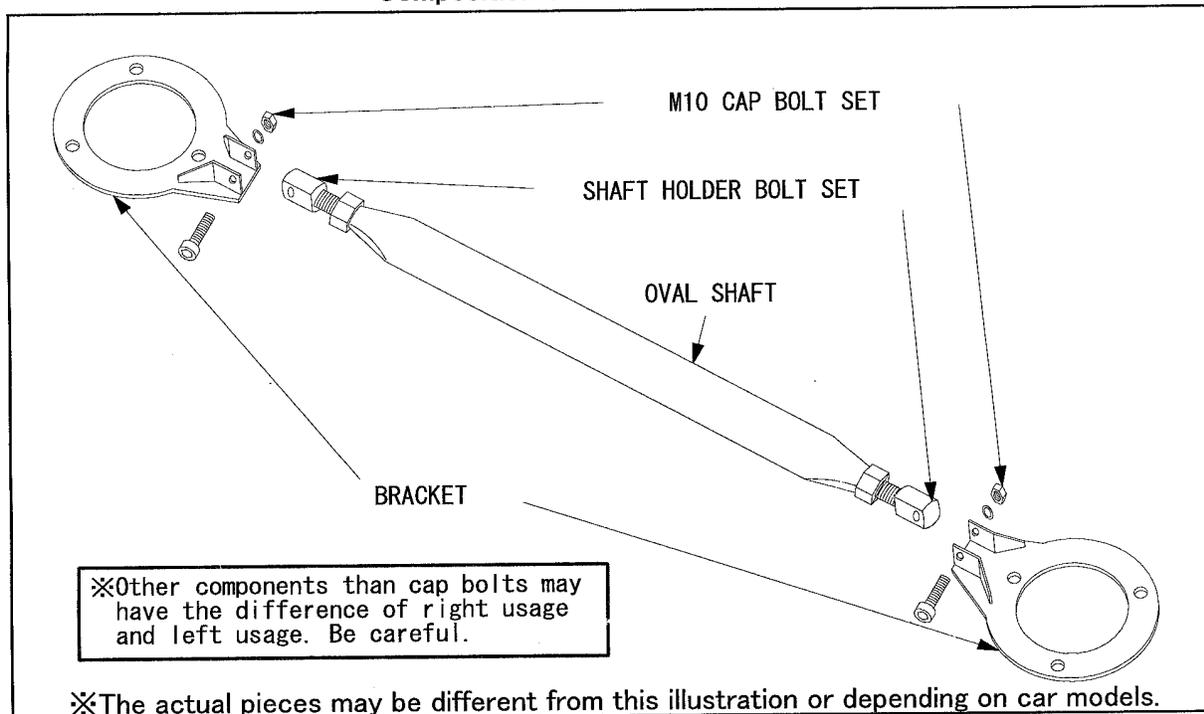

◆ Make sure of the contents of this package before usage.

Observe "Components and accessories" of the Manual Instruction of each car model.


《READ FIRST》

- This product is an reinforcement part to be installed on the car.
- Installation should be done only for the cars which are sold through authorized dealers and equipped with additional devices (cooler, pump etc) nominated by the car makers.

《ATTENTION AT INSTALLATION》

	ATTENTION	○OBSERVE THE BELOW MENTIONED REMARKS. IF YOUR HANDLING IS WRONG, IT WILL CAUSE ACCIDENT OR INJURY.
---	------------------	--

- Do not modify this product. If you modify it, warranty will not be covered.
- Each part inside the engine room is of high temperature while you drive a car. Start installation after every part has cool down. Wear heat resistant gloves and cloths during the works.
- For some car models, transfer/modification of pipes, hoses, ignition coil, wire etc. may be necessary. Among the pipes, some are difficult to bend. Be sure not to break them.
- Some surroundings of the bracket may require modifications or elimination. Be guided accordingly.
- Among some car models, there are cases that couplers/harness of electric parts near the bracket should be transferred while the installation. Fix them with the attached tie-wrap after installation.
- At the dispatch of this product, all the bolts and nuts are fastened provisionally. Fasten them during the installation.
- If you adjust the length of the oval shaft, the height of oval shaft changes. Adjust the length according to the status of the car (clearance of each part).

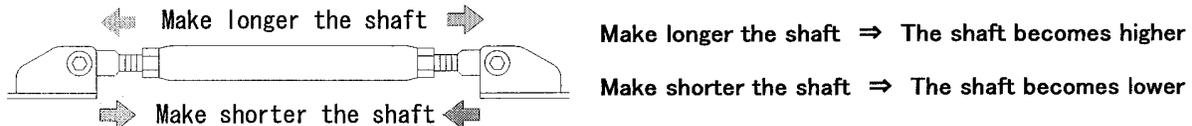

※The length of the shaft can be adjusted by twisting the shaft holder.

tanabe

4-15, Onoharahigashi, 1-chome, Minoo-shi, Osaka

TEL : 072-728-6700


FAX : 072-728-6744

Web site : <http://www.rd-tanabe.com>

《Cautions at installation of this product》

- Depending on car models, couplers, harnesses etc of electrical parts are close to this products.
In this case, couplers, harnesses etc touch it.
As tiewrap is attached for such car models, remove couplers, harnesses etc and fasten them to oval shaft with attached tiewrap.

A illustration of transfer of couplers and harnesses etc

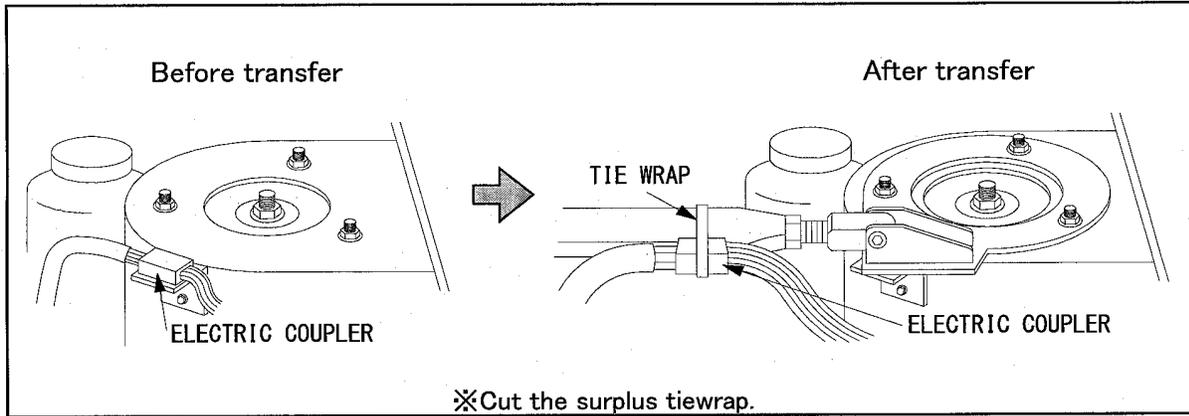

tanabe